

4451 E 72ND AVE

COMMERCE CITY CO 80022

PROPERTY TYPE

Commercial School - Elementary/Seco...

YEAR BUILT

-

BUILDING AREA


15,491 SF

ROOF SQUARES

155

PARCEL ID

0172131311001

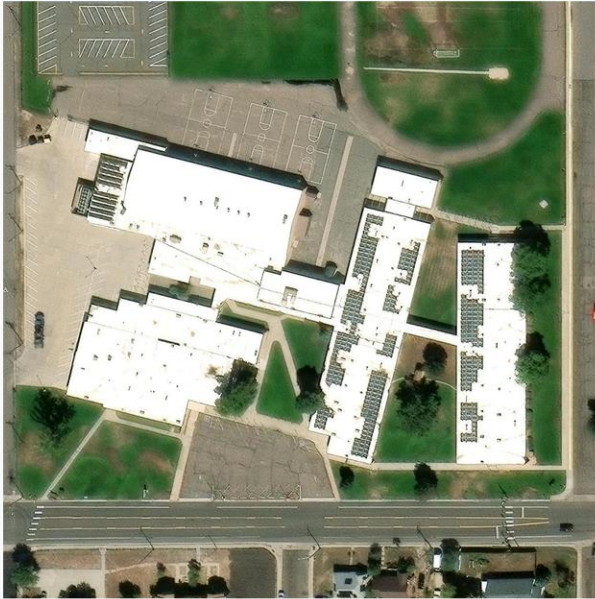

OVERALL ROOF CONDITION SCORE

69 /100
FAIR

RISK LEVEL

MODERATE



ROOF INFORMATION

ROOF TYPE	Low-slope / flat commercial school roof
ROOF SYSTEM	Likely single-ply membrane roof with multiple roof-mounted solar arrays and light rooftop equipment/penetrations
POSSIBLE TYPES	TPO/PVC (55%); Coating over membrane (32%); Modified bitumen (20%)
VISIBLE CONCERNS	dark staining/color variation; many penetrations/units; tree/debris exposure
ROOF AGE EST.	Appears moderate age; exact age unknown from imagery and metadata does not provide year built
ROOF AREA	15,491 SF
ROOF PITCH	Low-slope / near-flat
CONFIDENCE	74%

SELECTED AERIAL IMAGE - ESRI WORLD IMAGERY AS OF 11/13/2025

ROOF CONDITION BREAKDOWN

Membrane Condition		68/100
Ponding		72/100
Flashing & Seals		63/100
Penetrations		58/100
Overall Maintenance		62/100

AERIAL ROOF OBSERVATIONS

1. Visible risk factors include dark staining or inconsistent roof color, high penetration or rooftop-unit density, tree overhang or roof debris exposure.
2. The building has multiple connected low-slope roof sections with a predominantly white roof surface.
3. Several large solar panel arrays are present on the roof, especially on the right-side wings, adding penetrations and service complexity.
4. Darkened patches and uneven coloration are visible on portions of the roof, especially near edges and around some roof field transitions.
5. No obvious widespread ponding is visible in this image, though flat areas and staining suggest localized moisture-management concerns.

BUILDING CHARACTERISTICS

LAND AREA	2.12 acres
STORIES	-
CONSTRUCTION TYPE	-
TAX DISTRICT	-
LAND VALUE	-

REPORT SUMMARY

This appears to be a low-slope commercial school roof with a predominantly white roof covering and multiple solar arrays. Visible staining, uneven roof tone, and numerous roof-mounted elements suggest a serviceable but not pristine roof with moderate leak-path and maintenance risk. The imagery supports a fair condition assessment, with concern focused more on maintenance complexity and localized discoloration than on obvious widespread failure. Visible risk factors include dark staining or inconsistent roof color, high penetration or rooftop-unit density, tree overhang or roof debris exposure.

Recommendation:

Schedule a closer rooftop inspection to verify membrane type, check seams/flashing at solar mounts and other penetrations, and evaluate the darker stained areas for prior repairs or moisture intrusion. Trim back nearby trees where feasible and confirm drainage remains clear. Because the aerial view is dated 11/13/2025, current conditions may differ from what is visible here. Field inspection should verify drainage, moisture, penetrations, flashing, and debris-related damage.

ROOF REPLACEMENT COST ESTIMATE

TOTAL PROJECT COST	COST COMPONENT	COST
\$418,644	Tear Off & Disposal	\$50,965
	Roof Membrane	\$101,931
	Insulation	\$61,887
	Flashing/Edging	\$40,044
	Labor	\$109,212
	Replacement Subtotal	\$364,038
	Contingency (15%)	\$54,606
	Total Project Cost	\$418,644

This replacement cost is an estimate derived from aerial imagery, public property records, and commercial roofing cost models. It is intended for budgeting purposes only and should not be considered a contractor quote or engineering assessment.

ROOF OVERLAY COST ESTIMATE

TOTAL PROJECT COST	COST COMPONENT	COST
\$161,881	Overlay Subtotal	\$147,164
	Contingency (10%)	\$14,716
	Total Project Cost	\$161,881

This overlay cost is an estimate derived from aerial imagery, public property records, and commercial roofing cost models. It is intended for budgeting purposes only and should not be considered a contractor quote or engineering assessment.