

6345 COLORADO BLVD

COMMERCE CITY CO 80022


PROPERTY TYPE
Commercial Office Building

YEAR BUILT
-

BUILDING AREA
5,593 SF

ROOF SQUARES
56

PARCEL ID
0182512101037

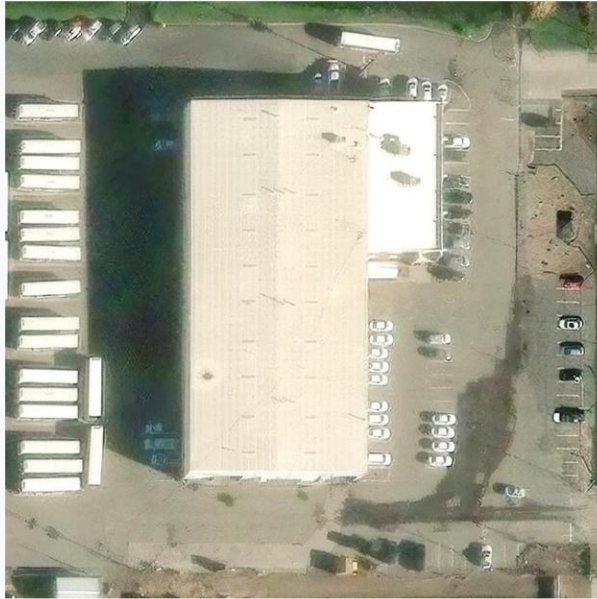

OVERALL ROOF CONDITION SCORE

68 /100
FAIR

RISK LEVEL

MODERATE



ROOF INFORMATION

ROOF TYPE	low-slope commercial roof
ROOF SYSTEM	metal roof or coated metal roof (exact system not verifiable from aerial imagery alone)
POSSIBLE TYPES	metal (78%); coating over membrane (32%)
VISIBLE CONCERNS	dark staining/color variation; Localized darker stains/discoloration are visible on the lighter roof section near the east/right side.; Dark roof areas along the left side appear more consistent with shadowing/adjacent tree shade than roof distress, based on shape and uniform darkness.
ROOF AGE EST.	appears moderate age; exact age not determinable from aerial imagery
ROOF AREA	5,593 SF
ROOF PITCH	low-slope

SELECTED AERIAL IMAGE - ESRI WORLD IMAGERY AS OF 11/13/2025

ROOF CONDITION BREAKDOWN

Membrane Condition		68/100
Ponding		72/100
Flashing & Seals		66/100
Penetrations		78/100
Overall Maintenance		64/100

AERIAL ROOF OBSERVATIONS

1. Visible risk factors include dark staining or inconsistent roof color.
2. The main roof reads as a light-colored low-slope system with visible longitudinal seams/ribs, which is most consistent with metal or a coated metal surface.
3. A smaller white roof section at the east/right side shows two notable dark stains/discolorations.
4. Perimeter and edge details are visible, but individual flashing conditions cannot be verified from this altitude.
5. No dense field of penetrations, skylights, or rooftop mechanical units is evident on the main roof plane.

BUILDING CHARACTERISTICS

LAND AREA	1.16 acres
STORIES	-
CONSTRUCTION TYPE	-
TAX DISTRICT	-
LAND VALUE	-

REPORT SUMMARY

The 11/13/2025 Esri aerial image shows a low-slope commercial roof that appears most consistent with a metal roof, or possibly a coated metal surface, based on the reflective light-colored finish and visible panel/seam pattern. Overall condition looks serviceable, but localized discoloration on the east/right roof section and limited ability to verify edge details keep the roof in fair condition rather than good. No obvious widespread ponding or heavy rooftop equipment field is visible from this image. Visible risk factors include dark staining or inconsistent roof color.

Recommendation:

Continue routine roof inspections and maintenance, with closer attention to the stained/discolored areas on the east/right section and to perimeter flashing/seal details. If not recently done, consider a field inspection to confirm whether the discoloration is cosmetic, repair-related, or associated with moisture intrusion. Monitor drainage and clean any debris from roof edges and adjacent gutters/scuppers as applicable.

ROOF REPLACEMENT COST ESTIMATE

TOTAL PROJECT COST	COST COMPONENT	COST
\$151,151	Tear Off & Disposal	\$18,401
\$23.50 / SF	Roof Membrane	\$36,802
	Insulation	\$22,344
	Flashing/Edging	\$14,458
	Labor	\$39,431
	Replacement Subtotal	\$131,436
	Contingency (15%)	\$19,715
	Total Project Cost	\$151,151

This replacement cost is an estimate derived from aerial imagery, public property records, and commercial roofing cost models. It is intended for budgeting purposes only and should not be considered a contractor quote or engineering assessment.

ROOF OVERLAY COST ESTIMATE

TOTAL PROJECT COST	COST COMPONENT	COST
\$58,447	Overlay Subtotal	\$53,134
\$9.50 / SF	Contingency (10%)	\$5,313
	Total Project Cost	\$58,447

This overlay cost is an estimate derived from aerial imagery, public property records, and commercial roofing cost models. It is intended for budgeting purposes only and should not be considered a contractor quote or engineering assessment.