

143 UNION BLVD

LAKEWOOD CO 80228


PROPERTY TYPE
Commercial Office Building 2120...

YEAR BUILT
1981

BUILDING AREA
12,884 SF

ROOF SQUARES
129

PARCEL ID
4908402004

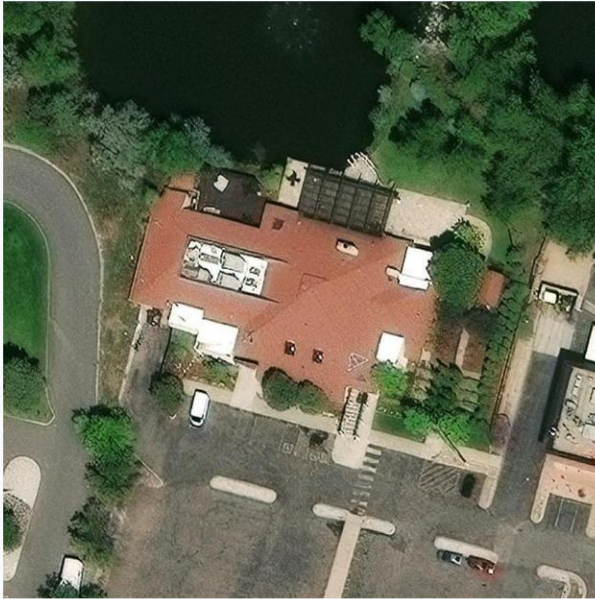

OVERALL ROOF CONDITION SCORE

58 /100
POOR

RISK LEVEL

HIGH



ROOF INFORMATION

ROOF TYPE	low-slope commercial roof with some sloped sections
ROOF SYSTEM	asphaltic shingle/sloped roof with low-slope rooftop sections and mixed rooftop equipment
POSSIBLE TYPES	asphalt shingles (86%); modified bitumen (33%); coating over membrane (25%)
VISIBLE CONCERNS	dark staining/color variation; many penetrations/units; tree/debris exposure
ROOF AGE EST.	Approximately 20-40 years based on 1981 construction date and visible weathering; aerial imagery alone cannot confirm roof replacement history.
ROOF AREA	12,884 SF
ROOF PITCH	mixed; predominant low-slope with some pitched roof planes

SELECTED AERIAL IMAGE - ESRI WORLD IMAGERY

ROOF CONDITION BREAKDOWN

Membrane Condition		60/100
Ponding		66/100
Flashing & Seals		54/100
Penetrations		52/100
Overall Maintenance		50/100

AERIAL ROOF OBSERVATIONS

1. Visible risk factors include dark staining or inconsistent roof color, high penetration or rooftop-unit density, tree overhang or roof debris exposure.
2. The building appears to have a mixed roof form, with a large reddish textured sloped roof and smaller low-slope rooftop sections.
3. Several rooftop penetrations and mechanical units are visible, particularly near the center and upper roof areas.
4. Tree canopy is close to multiple roof edges, which may contribute debris accumulation and maintenance demands.
5. No clear standing water is visible, but darker patches and tonal variation suggest areas that should be inspected for localized wear or past repairs.

BUILDING CHARACTERISTICS

LAND AREA	8.17 acres
STORIES	10
CONSTRUCTION TYPE	Commercial
TAX DISTRICT	-
LAND VALUE	\$4,448,025

REPORT SUMMARY

Aerial imagery shows a mixed commercial roof with a largely textured sloped roof surface and several rooftop equipment areas. The roof appears generally serviceable, but visible discoloration, multiple penetrations, and close surrounding trees increase leak and maintenance risk. No obvious ponding is visible from this image. Visible risk factors include dark staining or inconsistent roof color, high penetration or rooftop-unit density, tree overhang or roof debris exposure.

Recommendation:

Schedule a close-up roof inspection to verify flashing, seals, and the condition of the darker roof areas, especially around equipment and transitions. Trim back nearby trees and remove accumulated debris regularly to reduce abrasion and drainage-related risk. If the roof is original or near-original to the 1981 construction date, plan for lifecycle evaluation and targeted repairs as needed. Field inspection should verify drainage, moisture, penetrations, flashing, and debris-related damage.

ROOF REPLACEMENT COST ESTIMATE

TOTAL PROJECT COST	COST COMPONENT	COST
\$377,823	Tear Off & Disposal	\$45,996
\$25.50 / SF	Roof Membrane	\$91,992
	Insulation	\$55,852
	Flashing/Edging	\$36,140
	Labor	\$98,563
	Replacement Subtotal	\$328,542
	Contingency (15%)	\$49,281
	Total Project Cost	\$377,823

This replacement cost is an estimate derived from aerial imagery, public property records, and commercial roofing cost models. It is intended for budgeting purposes only and should not be considered a contractor quote or engineering assessment.

ROOF OVERLAY COST ESTIMATE

TOTAL PROJECT COST	COST COMPONENT	COST
\$141,724	Overlay Subtotal	\$128,840
\$10.00 / SF	Contingency (10%)	\$12,884
	Total Project Cost	\$141,724

This overlay cost is an estimate derived from aerial imagery, public property records, and commercial roofing cost models. It is intended for budgeting purposes only and should not be considered a contractor quote or engineering assessment.