

12250 W KENTUCKY DR

LAKEWOOD CO 80228


PROPERTY TYPE
Public School, Entire Elementary...

YEAR BUILT
1962

BUILDING AREA
39,689 SF

ROOF SQUARES
397

PARCEL ID
4917423001

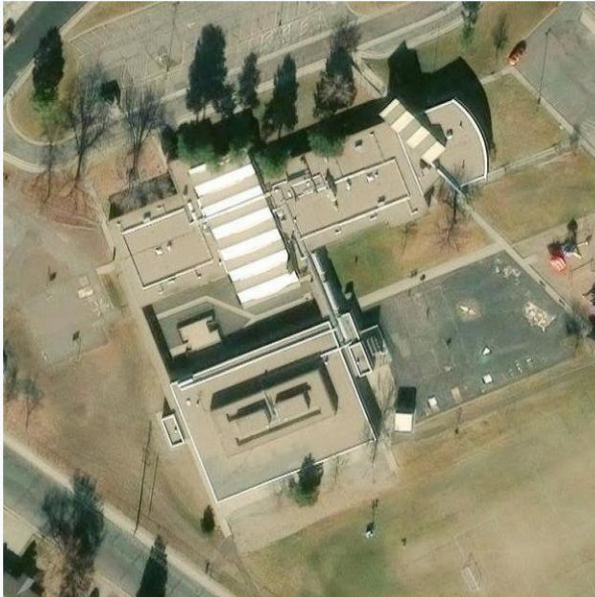

OVERALL ROOF CONDITION SCORE

62 /100
FAIR

RISK LEVEL

MODERATE



ROOF INFORMATION

ROOF TYPE	low-slope commercial/school roof with multiple flat roof sections
ROOF SYSTEM	likely modified bitumen or coated low-slope membrane on the primary sections; some areas may be tar and gravel/BUR or membrane overlaid with coating
POSSIBLE TYPES	Modified bitumen (62%); Coated membrane (58%); Tar and gravel/BUR (46%)
VISIBLE CONCERNS	dark staining/color variation; possible ponding; many penetrations/units; tree/debris exposure
ROOF AGE EST.	roof appears mid-life to older for a 1962-built school, but exact roof age is not discernible from aerial imagery
ROOF AREA	39,689 SF
ROOF PITCH	low-slope / near-flat
CONFIDENCE	74%

SELECTED AERIAL IMAGE - ESRI WORLD IMAGERY

ROOF CONDITION BREAKDOWN

Membrane Condition		65/100
Ponding		55/100
Flashing & Seals		64/100
Penetrations		58/100
Overall Maintenance		62/100

AERIAL ROOF OBSERVATIONS

1. Visible risk factors include dark staining or inconsistent roof color, possible ponding or drainage stress, high penetration or rooftop-unit density, tree overhang or roof debris exposure.
2. Multiple connected low-slope roof sections with parapet edges and several rooftop curbs/penetrations.
3. Main roof areas are generally intact and serviceable from aerial view, with no obvious large-scale open failure visible.
4. One extensive darker roof zone on the right side stands out from adjacent lighter sections and warrants closer inspection for ponding or repair history.
5. Roof geometry is complex enough to create drainage and flashing stress points at transitions and connectors.

BUILDING CHARACTERISTICS

LAND AREA	9.57 acres
STORIES	1
CONSTRUCTION TYPE	Public
TAX DISTRICT	-
LAND VALUE	\$478,495

REPORT SUMMARY

Aerial imagery shows a low-slope school roof with several connected sections that appear generally serviceable, but one larger darker roof area and the number of roof details increase concern for ponding, weathering, and leak-prone flashing conditions. The roof looks like an older commercial low-slope system, possibly modified bitumen, coated membrane, or a similar built-up assembly, though aerial imagery does not allow exact membrane identification. Tree proximity and rooftop complexity add maintenance risk. Visible risk factors include dark staining or inconsistent roof color, possible ponding or drainage stress, high penetration or rooftop-unit density, tree overhang or roof debris exposure.

Recommendation:

Perform a close-up roof inspection to confirm the source of the darker mottled area, check drainage performance, and evaluate flashings around penetrations, curbs, and roof transitions. Verify whether the darkened section reflects ponding, prior repair work, coating wear, or localized moisture damage. Trim back nearby trees where feasible and clear debris regularly to reduce moisture retention and puncture risk. Field inspection should verify drainage, moisture, penetrations, flashing, and debris-related damage.

ROOF REPLACEMENT COST ESTIMATE

TOTAL PROJECT COST	COST COMPONENT	COST
\$1,118,238	Tear Off & Disposal	\$136,133
	Roof Membrane	\$272,267
	Insulation	\$165,305
	Flashing/Edging	\$106,962
	Labor	\$291,714
	Replacement Subtotal	\$972,380
	Contingency (15%)	\$145,857
	Total Project Cost	\$1,118,238

This replacement cost is an estimate derived from aerial imagery, public property records, and commercial roofing cost models. It is intended for budgeting purposes only and should not be considered a contractor quote or engineering assessment.

ROOF OVERLAY COST ESTIMATE

TOTAL PROJECT COST	COST COMPONENT	COST
\$425,665	Overlay Subtotal	\$386,968
	Contingency (10%)	\$38,697
	Total Project Cost	\$425,665

This overlay cost is an estimate derived from aerial imagery, public property records, and commercial roofing cost models. It is intended for budgeting purposes only and should not be considered a contractor quote or engineering assessment.