

13410 MORRISON RD

LAKEWOOD CO 80228

PROPERTY TYPE

Garage/Shed Storage Warehouse 91...

YEAR BUILT

2006

BUILDING AREA


6,498 SF

ROOF SQUARES

65

PARCEL ID

4932200001

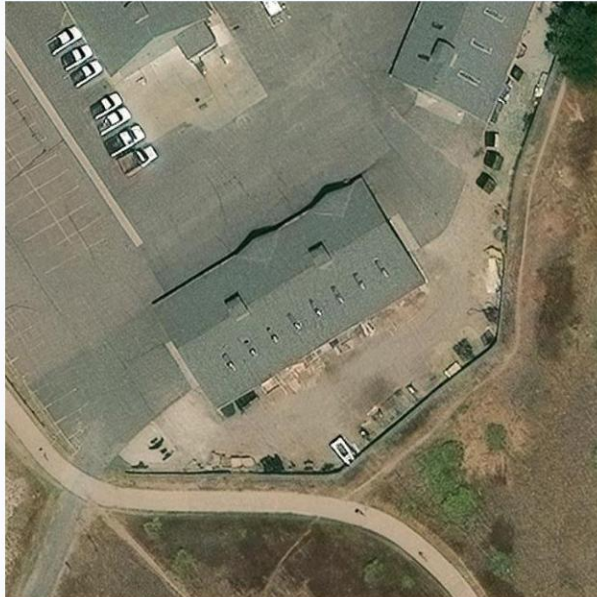

OVERALL ROOF CONDITION SCORE

62 /100
FAIR

RISK LEVEL

MODERATE



ROOF INFORMATION

ROOF TYPE	low-slope commercial roof
ROOF SYSTEM	single-ply membrane roof, likely TPO/PVC or similar light-colored membrane on the main building with adjacent darker low-slope roof areas
POSSIBLE TYPES	TPO/PVC (68%); EPDM (42%); Modified bitumen (36%)
VISIBLE CONCERNS	dark staining/color variation; possible ponding; many penetrations/units
ROOF AGE EST.	approximately 15-25 years old based on the 2006 construction date and apparent commercial low-slope roof appearance
ROOF AREA	6,498 SF
ROOF PITCH	low-slope
CONFIDENCE	72%

SELECTED AERIAL IMAGE - ESRI WORLD IMAGERY

ROOF CONDITION BREAKDOWN

Membrane Condition		65/100
Ponding		55/100
Flashing & Seals		64/100
Penetrations		58/100
Overall Maintenance		68/100

AERIAL ROOF OBSERVATIONS

1. Visible risk factors include dark staining or inconsistent roof color, possible ponding or drainage stress, high penetration or rooftop-unit density.
2. Main building appears to have a large low-slope roof with multiple rooftop penetrations.
3. Visible discoloration and darker areas on the roof surface reduce confidence in uniform membrane condition.
4. The roof geometry includes multiple sections and transitions, which can create additional flashing and seam risk.
5. Surrounding site has open exposure with no obvious heavy tree canopy over the roof.

BUILDING CHARACTERISTICS

LAND AREA	1,955.14 acres
STORIES	1
CONSTRUCTION TYPE	Garage/Shed
TAX DISTRICT	-
LAND VALUE	\$30,934,677

REPORT SUMMARY

The aerial image shows a low-slope commercial roof that appears generally serviceable, but with visible tonal inconsistency, darker discoloration, and multiple roof penetrations that raise leak-maintenance risk. The roof likely consists of a single-ply or similar membrane system, though aerial imagery alone cannot confirm membrane chemistry. The visible staining/discoloration suggests possible ponding or past repair areas, so the roof should be considered fair rather than clean or high-performing. Visible risk factors include dark staining or inconsistent roof color, possible ponding or drainage stress, high penetration or rooftop-unit density.

Recommendation:

Recommend a closer roof inspection, especially around penetrations, seams, transitions, and any darker or discolored areas. Verify drainage performance and check for evidence of ponding, prior repairs, or localized membrane wear. If not recently inspected, schedule a professional walk-through and moisture evaluation to confirm whether the visible discoloration is superficial or associated with active defects. Field inspection should verify drainage, moisture, penetrations, flashing, and debris-related damage.

ROOF REPLACEMENT COST ESTIMATE

TOTAL PROJECT COST	COST COMPONENT	COST
\$183,081	Tear Off & Disposal	\$22,288
	Roof Membrane	\$44,576
	Insulation	\$27,064
	Flashing/Edging	\$17,512
	Labor	\$47,760
	Replacement Subtotal	\$159,201
	Contingency (15%)	\$23,880
	Total Project Cost	\$183,081

This replacement cost is an estimate derived from aerial imagery, public property records, and commercial roofing cost models. It is intended for budgeting purposes only and should not be considered a contractor quote or engineering assessment.

ROOF OVERLAY COST ESTIMATE

TOTAL PROJECT COST	COST COMPONENT	COST
\$69,691	Overlay Subtotal	\$63,356
	Contingency (10%)	\$6,336
	Total Project Cost	\$69,691

This overlay cost is an estimate derived from aerial imagery, public property records, and commercial roofing cost models. It is intended for budgeting purposes only and should not be considered a contractor quote or engineering assessment.