

5180 E SMITH RD

DENVER CO 80216


PROPERTY TYPE
INDUSTRIAL-WAREHOUSE 398: WAREHOU...

YEAR BUILT
1974

BUILDING AREA
27,017 SF

ROOF SQUARES
270

PARCEL ID
0119400264000

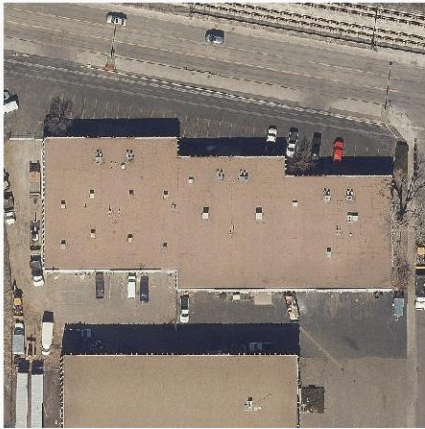

OVERALL ROOF CONDITION SCORE

60 /100
FAIR

RISK LEVEL

MODERATE



ROOF INFORMATION

ROOF TYPE	low-slope commercial roof
ROOF SYSTEM	Primary: Likely single-ply membrane roof (exact chemistry not determinable from aerial imagery); possible coated or modified membrane sections
VISIBLE CONCERNS	dark staining/color variation; many penetrations/units; Multiple small rooftop penetrations/vents/curbs are visible across the main roof field, increasing flashing and seal risk.
ROOF AGE EST.	Appears mid- to older-life; property year built 1974 and roof surface shows general weathering but no obvious widespread failure from aerial view.
ROOF AREA	27,017 SF
ROOF PITCH	Low-slope / near-flat
CONFIDENCE	72%

SELECTED AERIAL IMAGE - DENVER GIS AS OF 03/11/2018 - 03/17/2018

ROOF CONDITION BREAKDOWN

Membrane Condition		59/100
Ponding		64/100
Flashing & Seals		55/100
Penetrations		54/100
Overall Maintenance		60/100

AERIAL ROOF OBSERVATIONS

1. Main roof field is a large, low-slope commercial roof with a generally uniform tan surface.
2. Numerous small rooftop penetrations and fixtures are visible, especially across the central and right roof areas.
3. Localized darker areas and slight color variation are present, but not enough from aerial imagery alone to confirm failure.
4. No obvious tree overhang touching the roof and no heavy debris accumulation are visible.
5. The image does not provide enough resolution to distinguish TPO/PVC from other membrane types with high confidence.

BUILDING CHARACTERISTICS

LAND AREA	1.43 acres
STORIES	-
CONSTRUCTION TYPE	398: WAREHOUSE
TAX DISTRICT	DENV
LAND VALUE	\$936,900

REPORT SUMMARY

Aerial imagery dated 03/11/2018 - 03/17/2018 shows a large low-slope commercial roof in fair current-likely condition with moderate serviceability risk. The roof surface is generally uniform, but localized dark discoloration and several rooftop penetrations/fixtures are visible, increasing leak and flashing risk. No clear widespread ponding, heavy debris, or tree encroachment is visible, though older imagery may understate current deterioration.

Recommendation:

Recommend a qualified commercial roofing contractor perform an onsite inspection to confirm the roof system, inspect flashing/seals around penetrations, and verify whether the localized discoloration reflects staining, prior repairs, or moisture-related issues. If the roof is a restorable low-slope membrane and not an incompatible substrate, evaluate silicone roof restoration as a potential option before overlay or full replacement; a properly designed system can reduce tear-off waste, cost, and disruption, create a seamless reflective surface, and may improve resistance to UV exposure and hail, with manufacturer warranties up to 20 years when eligibility criteria are met. If moisture, insulation failure, structural/deck deterioration, or substrate incompatibility is found, pursue overlay or replacement evaluation instead. Confirm required repairs, preparation, moisture testing if warranted, and obtain a reliable project-price proposal.

ROOF REPAIR OPTIONS

Roof Replacement Cost Estimate

TOTAL PROJECT COST	COST SUMMARY
\$761,204	Replacement Subtotal \$661,916
\$24.50 / SF	Contingency (15%) \$99,287
	Total Project Cost \$761,204

Roof Overlay Cost Estimate

TOTAL PROJECT COST	COST SUMMARY
\$297,187	Overlay Subtotal \$270,170
\$10.00 / SF	Contingency (10%) \$27,017
	Total Project Cost \$297,187

Roof Coating Estimate

TOTAL PROJECT COST	WARRANTY TERM	BUDGETARY COST RANGE
\$94,560 - \$162,102	10 Year Warranty	\$94,560 - \$108,068
\$3.50 - \$6.00 / SF	15 Year Warranty	\$121,576 - \$135,085
	20 Year Warranty	\$148,594 - \$162,102

Cost estimates are derived from publicly available information and proprietary commercial roofing analysis models and are intended for preliminary budgeting and planning purposes only. Roof-area measurements do not include the vertical surface area of parapet walls. They should not be considered a contractor quote, engineering assessment, or guarantee of actual project costs. Estimates do not include additional repairs or unforeseen conditions that may be identified during an on-site inspection.